


**4SP**

**TUBO FLESSIBILE EN 856-4SP - ISO 3862 4SP**  
**FLEXIBLE HYDRAULIC HOSE EN 856-4SP - ISO 3862 4SP**  
**HYDRAULIKSCHLAUCH EN 856-4SP - ISO 3862 4SP**

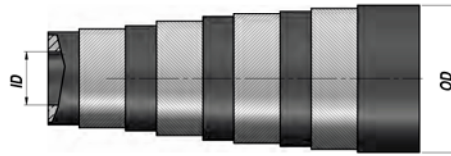


Codice Code Bestell-Nr.	ID			OD mm	P MAX bar		Temperatura d'esercizio Working temperature Temperaturbereich	Colore Colour Farbe	kg x 100 m
	inch	mm	size		Esercizio Work Betrieb	Scoppio Burst Bersten			
FG406A0000	3/8"	9,5	06	21,4	445	1780	-40° C - + 100°C (120° intermittente - intermitt - intermittierend)	Nero Black Schwarz	79,00
FG408A0000	1/2"	12,7	08	24,6	415	1660			94,00
FG410A0000	5/8"	16,0	10	28,5	350	1400			112,50
FG412A0000	3/4"	19,0	12	32,1	350	1400			149,70
FG416A0000	1"	25,4	16	39,7	280	1120			215,00
FG420A0000	1"1/4	31,8	20	50,8	210	840			315,70
FG424A0000	1"1/2	38,1	24	57,1	185	740			371,30
FG432A0000	2"	50,8	32	70,6	165	660			487,00

Sottostrato - Tube - Innenseele:  
 Rinforzo - Reinforcement - Einlage:  
 Copertura - Cover - Ummantelung:

Gomma sintetica resistente agli oli idraulici - Hydraulic oil resistant synthetic rubber - Hydraulikölbeständiger Synthesekautschuk  
 4 Spirali in acciaio ad altissima resistenza - 4 High tensile steel spirals - 4 Stahldrahtspirallagen höchster Festigkeit.  
 Gomma sintetica resistente agli oli, all'abrasione e agli agenti atmosferici - Oil, abrasion and weather resistant synthetic rubber - Öl-, Abrieb - und wetterbeständiger Synthesekautschuk

**4SH**

**TUBO FLESSIBILE EN 856-4SH - ISO 3862 4SH**  
**FLEXIBLE HYDRAULIC HOSE EN 856-4SH - ISO 3862 4SH**  
**HYDRAULIKSCHLAUCH EN 856-4SH - ISO 3862 4SH**

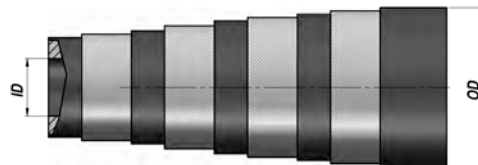

Codice Code Bestell-Nr.	ID			OD mm	P MAX bar		Temperatura d'esercizio Working temperature Temperaturbereich	Colore Colour Farbe	kg x 100 m
	inch	mm	size		Esercizio Work Betrieb	Scoppio Burst Bersten			
FG512A0000	3/4"	19,0	12	32,0	420	1780	-40° C - + 100°C (120° intermittente - intermitt - intermittierend)	Nero Black Schwarz	157,20
FG516A0000	1"	25,4	16	38,4	385	1750			210,40
FG520A0000	1"1/4	31,8	20	45,8	350	1400			255,00
FG524A0000	1"1/2	38,1	24	53,5	300	1250			322,50
FG532A0000	2"	50,8	32	68,0	250	1000			460,00

Sottostrato - Tube - Innenseele:  
 Rinforzo - Reinforcement - Einlage:  
 Copertura - Cover - Ummantelung:

Gomma sintetica resistente agli oli idraulici - Hydraulic oil resistant synthetic rubber - Hydraulikölbeständiger Synthesekautschuk  
 4 Spirali in acciaio ad altissima resistenza - 4 High tensile steel spirals - 4 Stahldrahtspirallagen höchster Festigkeit  
 Gomma sintetica resistente agli oli, all'abrasione e agli agenti atmosferici - Oil, abrasion and weather resistant synthetic rubber - Öl-, Abrieb - und wetterbeständiger Synthesekautschuk