


**TUBO FLESSIBILE SAE 100 R7**  
FLEXIBLE HYDRAULIC HOSE SAE 100 R7  
HYDRAULIKSCHLAUCH SAE 100 R7

**R7**

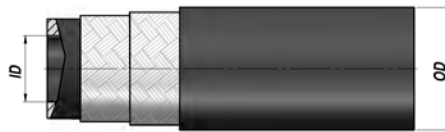

Codice Code Bestell-Nr.	ID			OD mm	P MAX bar		Temperatura d'esercizio Working temperature Temperaturbereich	Colore Colour Farbe	kg x 100 m
	inch	mm	size		Esercizio Work Betrieb	Scoppio Burst Bersten			
FG703A0000	3/16"	4,8	03	10,0	210	840	-40°C - +100°C	Nero Black Schwarz	7,30
FG704A0000	1/4"	6,4	04	11,8	200	800			9,00
FG705A0000	5/16"	8,0	05	14,3	190	760			12,80
FG706A0000	3/8"	9,7	06	16,0	175	700			15,50
FG708A0000	1/2"	13,0	08	20,3	140	560			21,90
FG712A0000	3/4"	19,2	12	26,5	90	360			33,00

Sottostrato - Tube - Innenseele: Poliestere resistente agli oli idraulici, aria e fluidi a base acquosa - Hydraulic oil, air and water based fluids resistant polyester - Polyester gegen Hydrauliköl, Luft und Flüssigkeiten auf Wasserbasis beständig

Rinforzo - Reinforcement - Einlage: 2 Treccie in poliestere ad alta tenacità - 2 High tensile polyester fibre braids - 2 Polyestergeflechte hoher Festigkeit

Copertura - Cover - Ummantelung: Poliuretano antiabrasione, resistente all'olio e agli agenti atmosferici - Oil, abrasion and weather resistant polyurethane - Polyurethan abriebfest, öl- und wetterbeständig

**TUBO FLESSIBILE JET CLEANING (1SC)**  
FLEXIBLE HYDRAULIC HOSE JET CLEANING (1SC)  
HYDRAULIKSCHLAUCH JET CLEANING (1SC)

**1SC**



Codice Code Bestell-Nr.	ID			OD mm	P MAX bar		Temperatura d'esercizio Working temperature Temperaturbereich	Colore Colour Farbe	kg x 100 m
	inch	mm	size		Esercizio Work Betrieb	Scoppio Burst Bersten			
FGFB001K04	1/4"	6,5	04	12,4	250	1000	-40° C - + 135°C (155° intermittente - intermitt - intermittierend)	Azzurro Blue Blau	18,20
FGFB001K05	5/16"	8,0	05	14,0	250	1000			20,30
FGFB001K06	3/8"	9,5	06	15,6	250	1000			25,60
FGFB001K08	1/2"	12,7	08	18,7	250	1000			34,10

Sottostrato - Tube - Innenseele: Gomma sintetica resistente all'acqua calda, agli oli e ai detersivi - Hot water, oil and cleaning solutions resistant synthetic rubber - Heißwasser-, Öl- und Reinigungsmittelbeständiger Synthetikgummi

Rinforzo - Reinforcement - Einlage: 1 Treccia in acciaio ad alta tenacità - 1 High tensile steel wire braid - 1 Stahldrahtgeflecht hoher Festigkeit

Copertura - Cover - Ummantelung: Gomma sintetica microforata, resistente agli oli, all'abrasione e agli agenti atmosferici - Oil, abrasion and weather resistant pin pricked synthetic rubber - Synthetikgummi geprickt, öl-, abrieb- und wetterbeständig